



TS-8-MTS

NTSC TEST SIGNAL AND MTS STEREO GENERATOR

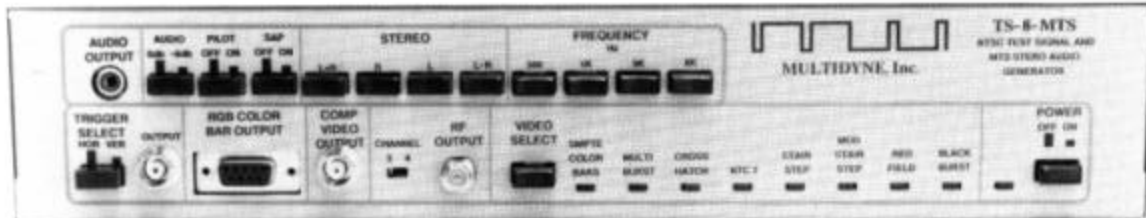


FEATURES

- 8 NTSC Test Signals:
 - SMPTE Color Bars
 - Multiburst
 - Cross Hatch
 - NTC7
 - Staircase
 - Modulated Stairstep
 - Red Field
 - Blackburst
- Conforms to RS-170A specifications.
- 8 bit digital video generation.
- RGB color bar output.
- H and V scope trigger output.
- Composite video output.
- Multi-channel television sound (MTS).
- Sound modulation of 300Hz, 1KHz, 3KHz and 8KHz signals.
- Stereo (L+R, L, R, L-R) and second audio program (SAP) multiplexed signals.
- Composite MTS audio output.
- RF audio/video output with front panel selection of Ch. 3 or Ch. 4.

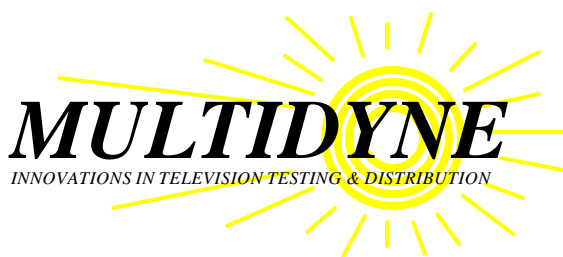


In the USA and Canada call **1-(800)-4TV-TEST**
191 Forest Avenue, Locust Valley, NY 11560-2132 USA
1-(800)-488-8378, (516)-671-7278, FAX (516)-671-3362

E-Mail: info@multidyne.com
Web Site: www.multidyne.com

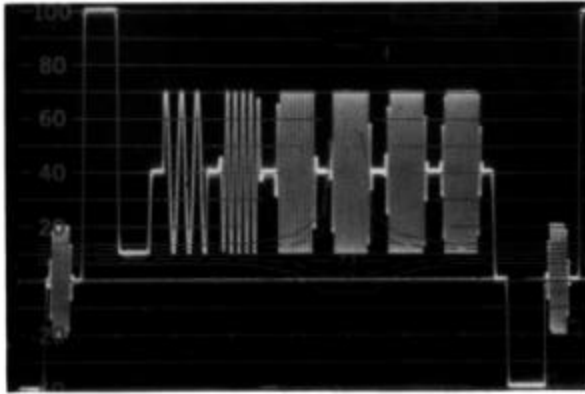

MULTIBURST

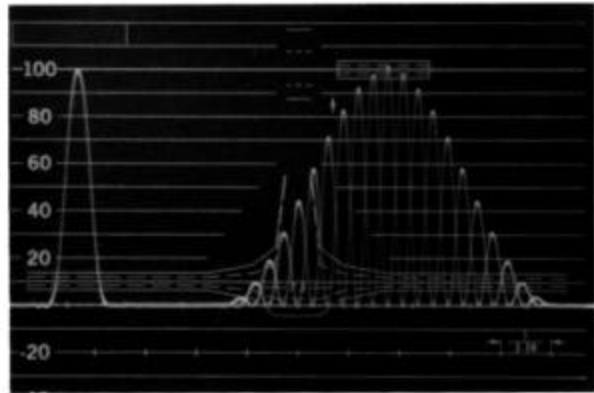

NTC7

SIGNAL EXCELLENCE

SPECIFICATIONS


Video Test Signals:

- Luminance amplitude accuracy..... ± 1%
- Chrominance to luminance gain..... ± 2%
- Chrominance to luminance delay..... ± 15 ns
- Output impedance 75 Ω
- Differential gain ≤ 1%
- Differential phase ≤ 0.6 degrees

Audio Test Signals:

- Frequencies: (+ /-5%)..... 300Hz
1KHz
3KHz
8KHz
- Output impedance 600 Ω
- Pilot..... 200 mVp-p
- SAP 600 mVp-p
- Distortion..... ≤ 0.5%
- Separation (300Hz, L, R modes) 30dB

Dimensions..... 13" X 6½" X 2½"
Weight..... 4 LBS.

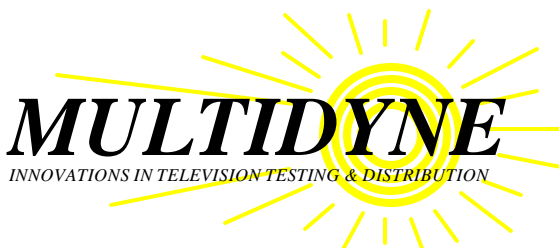

In the USA and Canada call **1-(800)-4TV-TEST**
 191 Forest Avenue, Locust Valley, NY 11560-2132 USA
 1-(800)-488-8378, (516)-671-7278, FAX (516)-671-3362
 E-Mail: info@multidyne.com
 Web Site: www.multidyne.com