

FEATURES

- ▶ Rugged Case/Enclosure.
- ▶ Runs on External DC Power Supply or Via Optional Battery Support
- ▶ Optional Anton Bauer or V-Lock Battery Plate
- ▶ Optical Connector Options Include Neutrik opticalCon, SMPTE, and ST.
- ▶ Optional Remote Power Via Hybrid Fiber Cable

APPLICATIONS


- ▶ ENG
- ▶ Sports
- ▶ Military
- ▶ Any Field Application Where Battery or Remote Powered Equipment Required

An Ideal Solution For Small Remote Broadcast Productions



The Bulldog Mini is a compact, rugged field fiber transport device designed from the ground up to meet the needs of single camera and booth kit setups. The Bulldog Mini can transport bidirectional 3G-SDI, IFB and two MIC/line audios as well as, two serial data channels – all over a single strand of single-mode fiber. Optical connector options include SMPTE, opticalCon or standard ST. With options for remote power via SMPTE hybrid fiber cable and battery operation, the Bulldog Mini is ready for any location regardless of available power.

APPLICATIONS

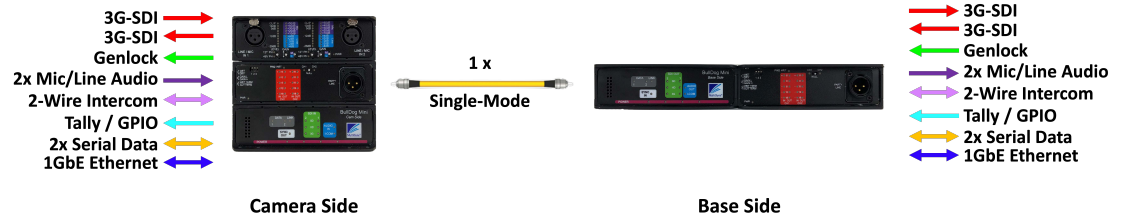

ORDERING INFORMATION

Part #	Description
<i>BMC-3806-CM11SDAA-ST</i>	<i>Bulldog Mini Portable Camera Side Transceiver with (1) 3G-SDI Video Input, (1) 3G-SDI Video Output, (1) Genlock/Sync Output, (2) Mic/Line Level Audio Inputs, (2) Line Level Audio Outputs, (1) 2-Wire Party Line Intercom (RTS or Clear-Com) (2) Serial Data (RS-232/RS-422), (1) Tally & (1) GPIO. (1) Single-mode fiber operation with ST connector</i>
<i>BMB-3806-C11SDAB-ST</i>	<i>Bulldog Mini Portable Base Side Transceiver with (1) 3G-SDI Video Input, (1) 3G-SDI Video Output, (1) Genlock/Sync Input, (2) Mic/Line Level Audio Outputs, (2) Line Level Audio Inputs, (1) 2-Wire Party Line Intercom (RTS or Clear-Com) (2) Serial Data (RS-232/RS-422), (1) Tally & (1) GPIO. (1) Single-mode fiber operation with ST connector</i>
<i>BMC-3822-CM11SDAEA-ST</i>	<i>Bulldog Mini Portable Camera Side Transceiver with (1) 3G-SDI Video Input, (1) 3G-SDI Video Output, (1) Genlock/Sync Output, (2) Mic/Line Level Audio Inputs, (2) Line Level Audio Outputs, (1) 2-Wire Party Line Intercom (RTS or Clear-Com) (2) Serial Data (RS-232/RS-422), (1) Tally, (1) GPIO & (1) Gigabit Ethernet. (1) Single-mode fiber operation with ST connector</i>
<i>BMB-3822-C11SDAEB-ST</i>	<i>Bulldog Mini Portable Base Side Transceiver with (1) 3G-SDI Video Input, (1) 3G-SDI Video Output, (1) Genlock/Sync Input, (2) Mic/Line Level Audio Outputs, (2) Line Level Audio Inputs, (1) 2-Wire Party Line Intercom (RTS or Clear-Com), (2) Serial Data (RS-232/RS-422), (1) Tally, (1) GPIO & (1) Gigabit Ethernet. (1) Single-mode fiber operation with ST connector</i>

Other signal configurations are also available. Contact the Sales Office for additional information.