


### FEATURES


- ▷ Excellent Value
- ▷ Compact Size
- ▷ Rugged Steel Enclosure
- ▷ Highest of Quality Components

### APPLICATIONS

- ▷ Live Broadcast
- ▷ Arenas and Stadiums
- ▷ Shared Control Rooms
- ▷ Campus Facilities

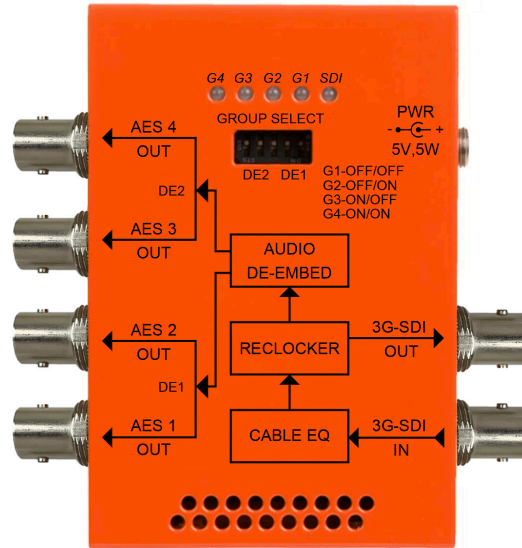

NBX-DE-4AES-3G

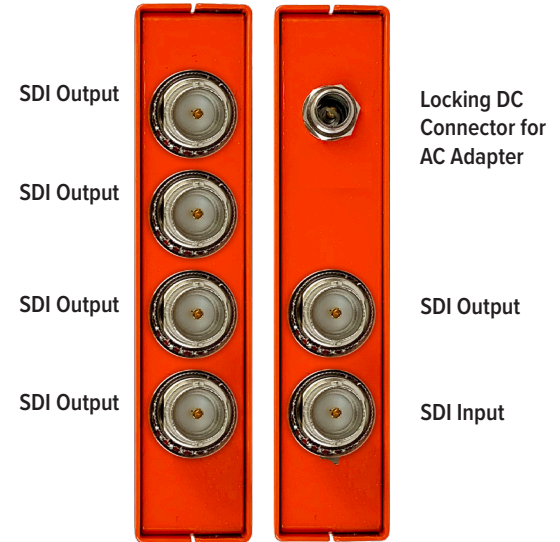

The NBX-DE-4AES-3G from MultiDyne provides a cost-effective miniature solution to demux four AES/EBU digital audio signals from a 3G/HD/SD-SDI signal.

The NBX-DE-4AES-3G accepts one SIDE signal and provides one reclocked SDI output on BNC connectors. The four DIP switch assignable AES/EBU outputs are also provided on BNC connectors.

A dual-color LED indicator provides SDI signal status indication. A green LED indicates the unit is locked to a valid

SDI signal while a red LED indicates a valid SDI signal is not present at the input.

When illuminated green the four LED's labeled G1, G2, G3, G4 indicate that AES/EBU audio is detected in those groups and is available to be demuxed. If the LED is not illuminated this indicates that audio is not present in the respective group.

Power to the NBX-DE-4AES-3G is provided by an external AC Adapter with locking DC connector supplied with the module.

### TECHNICAL SPECIFICATIONS

#### Mechanical, Environmental

Power	5VDC, .5W Adapter
Dimensions	3.938" x 2.625" x 0.813" (L x W x H)
Weight	7.8oz

### ORDERING INFORMATION

Part #	Description
NBX-DE-4AES-3G	3G/HD/SD-SDI Audio De-Embedder 4 AES/EBU Outputs. Includes Power Supply.