


FEATURES

- ▷ Fiber Transport From 5Mbps to 3Gbps
- ▷ Supports SMPTE 424M, 292M, 259M, 310M, 344M, 305M & DVB-ASI
- ▷ Equalizes 120m of Gepco VSD2001 or Belden 1694A Cable
- ▷ Equalizes 150m of Gepco VSD2001 or Belden 1694A Cable at 1.485 Gb/sec
- ▷ Supports Embedded Audio and Data
- ▷ Monitor Optical Power Level at RX
- ▷ Non Re-clocking
- ▷ Single-mode Fiber Recommended
- ▷ ST Optical Connector
- ▷ Small, Rugged, Portable
- ▷ Stand-Alone or Rack Mounted
- ▷ Power Supplies and Convenient Case Included
- ▷ International AC Adapters Included
- ▷ One Year Warranty

APPLICATIONS

- ▷ Sports Production
- ▷ Remote Camera Links
- ▷ Distance Learning
- ▷ OB Van Inter-Connects
- ▷ Pre-Fibered Venues
- ▷ Courtesy Feeds

For Fixed Links or Last Minute SDI Feeds

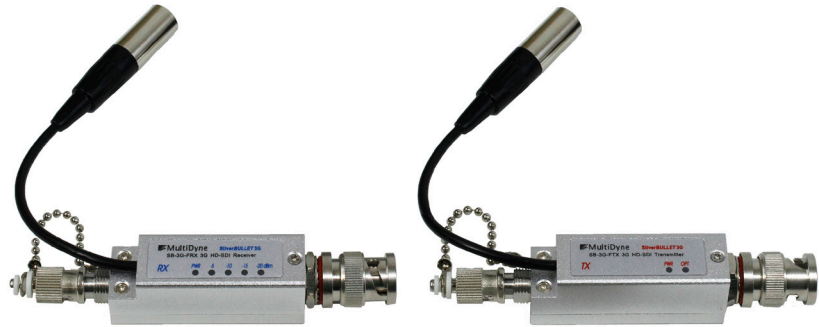

The SilverBullets are a highly portable and economical solution for transporting multi-rate SDI signals from 5 Mb/sec all the way up to 12 Gb/sec on single-mode or multimode fiber. At just three inches in length, SilverBullets are perfect for a wide variety of today's pro A/V and broadcast applications. But don't let the small size fool you! The case is a rugged, diecast aluminum that is overmolded for even more rigidity. The optical connector is the popular metallic ST-type and the video connector is the standard BNC male. Power (5-16 VDC) is supplied via a locking 4-pin mini-XLR connector that eliminates any possibility of the power cord accidentally becoming unplugged.

Integrated LEDs make troubleshooting easy with DC power and optical laser indications on the transmitter and DC power and optical power reporting on the receiver. Not only can your RX unit receive SDI signals, it can also be used as a confidence optical power meter for ANY digital optical signal.


The SilverBullets do NOT reclock so your ASI paths

will work the same as uncompressed paths. The result is error-free operation even with challenging pathological pattern testing.

Although the SilverBullets are small in size, this does not mean they can't handle long links. With an optical launch power of -6dBm for standard units (0 dBm for CWDM units) and receiver sensitivity to -20 dBm, runs of 25km or more are possible – and with optical power to spare. SilverBullet transmitters can also be ordered at any of 18 CWDM wavelengths in order to facilitate optical multiplexing with our CWDM-2000 line of CWDM mux and demux units. Each pair of SilverBullets comes packaged in a convenient case with 100-240VAC input wall-mount power supplies. For instances when you want to power your units from your camera battery, optional "Power Clip" Power Tap adapters or full-sized 4-pin XLR adapters are available.

The SilverBullets from Multidyne. The next time you need just one more feed ten minutes prior to air, you'll be glad you have them.

APPLICATION & USAGE

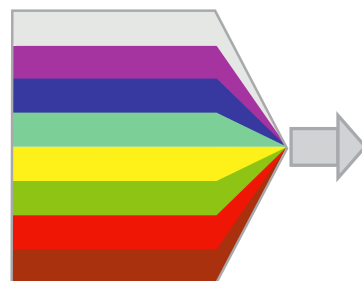

CWDM wavelengths are available for easy optical multiplexing via our CWDM-2000 modules



SilverBullets use industry standard, locking mini 4-pin XLR's for power. 0A Power-Tap adapter is also available



The case, power supplies and international AC plug adapters are all included

3G TECHNICAL SPECIFICATIONS

Digital Video

Bit Rates	5Mbps to 3Gbps
# of Ins/Outs	1 BNC
Impedance	75 Ohms
Level	800mV (peak to peak)
Standard	SMPTE 425M, 297M, 292M, 259M-C & DVB-ASI
Bit Error Rate	(@-22dBm) 10-11
Rise/Fall Times	<120psecs

Optical

Wavelengths	18 Ch. CWDM
Optical Connector	ST
Optical Source	FP laser or CWDM DFB
Optical Detector	PIN Diode
TX Output	-6 Standard (0 DFB)
RX Sensitivity	-20 dBm
Link Budget:	14 to 20 dB (up to 40km)*
Fiber Typ:	Multimode or Singlemode Singlemode recommended

* Distances based on using SINGLEMODE fiber

Mechanical, Environmental

Power	5-16 VDC
Consumption	600 mWatts
Temperatur:	0 to +55C
Humidity	0-95% RH non-condensing
Dimensions	3.2 x 0.65 x 0.75 inches
Weight	2.5 oz.

Coax Equalization

@ 270Mb/sec	350m
@ 1.5Gb/sec	140m
@ 3 Gb/sec	50m

12G TECHNICAL SPECIFICATIONS

Digital Video

Bit Rate:	1.5Gbps to 12Gbps
# of Ins/Out:	1 BNC
Impedance	75 Ohms
Level	800mV (peak to peak)
Standard	SMPTE 424M, 292M, 297M, 2082-1, 2081-1
Bit Error Rate	(-12dBm) 10-11 @12G
Rise/Fall Times	<34PS @ 12G

Optical

Wavelengths	18CH CWDM
Optical Connector	ST
Optical Source	FP laser or CWDM DFB
Optical Detector	PIN Diode
TX Output	-3 Standard (0 DFB)
RX Sensitivity	-12 dBm @ 12G
Link Budget	13 to 10 dB (up to 40km)* 3G
Fiber Type	Singlemode

* Distances based on using Single-mode fiber

Mechanical, Environmental

Power	5-16 VDC
Consumption	1.5 Watts
Temperature	-10C to +55C
Humidity	0-90% RH non-condensing
Dimensions	3.2 x 0.65 x 0.75 inches
Weight	4.0 oz.

Coax Equalization

@ 1.485 GBPS	160m
@ 2.97 GBPS	100m
@ 5.94 GBPS	80m
@11.88 GBPS	75m

ORDERING INFORMATION

Module	Case & Power Supplies Included
SB-3G-FTX-ST	SilverBullet 3.0 Gbps Multi-rate Serial Digital Video Transmitter @ 1310nm, -6dBm for: SD/HD-SDI, DVB ASI, SMPTE 310M, ST connector
SB-3G-FTX-xxxx-ST	SilverBullet 3.0 Gbps Multi-rate Serial Digital Video Transmitter, CWDM wavelengths, 0 to +3 dBm for: SD/HDSI, 3G HD-SDI, DVB ASI, SMPTE 310M, ST connector
SB-3G-FRX-ST	SilverBullet 3.0 Gbps Multi-rate Serial Digital Video Receiver, Sensitivity -20 dBm for: SD/HD-SDI, DVB ASI, SMPTE 310M, ST connector
SB-12G-FTX-ST	SilverBullet 12.0 Gbps Multi-rate Serial Digital Video Transmitter @ 1310nm, -6dBm for: SD/HD-SDI, DVB ASI, SMPTE 310M, ST connector
SB-12G-FTX-xxxx-ST	SilverBullet 12.0 Gbps Multi-rate Serial Digital Video Transmitter, CWDM wavelengths, 0 to +3 dBm for: SD/HDSI, 3G HD-SDI, DVB ASI, SMPTE 310M, ST connector
SB-12G-FRX-ST	SilverBullet 12.0 Gbps Multi-rate Serial Digital Video Receiver, Sensitivity -20 dBm for: SD/HD-SDI, DVB ASI, SMPTE 310M, ST connector

Accessories	
SB-PS-XLR	Replacement power supply for SilverBullet, mini-XLR to universal AC adapter
SB-PC-PT	Anton Bauer Power tap power supply for SilverBullet