

# HSA-6

## HEADSET AMPLIFIER




### FEATURES

- Drives a 2K  $\Omega$  (maximum) Headset
- Fully Adjustable Gain
- Accepts Line or Microphone Level Audio as Input

### SPECIFICATIONS

Amplifier Response (300-15 KHz).....	$\pm$ 1.0 dB
Gain: (Adjustable).....	HIGH LOW
Output Load.....	2K Max
Input Connector.....	Female XLR
Output Connector.....	1/4" and 1/8" Audio Jacks
Power Consumption (@ 9V DC).....	1.5 mAmps
Dimension.....	3" X 4" X 1"
Weight.....	0.5 LBS

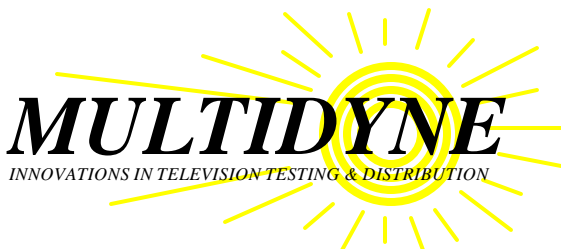

In the USA and Canada call **1-(800)-4TV-TEST**  
 191 Forest Avenue, Locust Valley, NY 11560-2132 USA  
 1-(800)-488-8378, (516)-671-7278, FAX (516)-671-3362  
**E-Mail: [info@multidyne.com](mailto:info@multidyne.com)**  
**Web Site: [www.multidyne.com](http://www.multidyne.com)**